




Ultra-Short-Throw Projector with Widescreen Projection and a Host of Connectivity Options

FEATURES

- 3,300 ANSI lumens with a 10,000:1 contrast ratio
- Delivers a large 80" to 100" image from a ultra-short distance
- Helps prevent shadow obstruction and light glare in the presenter's eyes
- DisplayPort connector for digital audio and video signals
- DLP® and BrilliantColor™ technologies for sharp and detailed image quality
- High-efficiency lamp that last up to 10,000 hours (in economy mode)
- Network ready for integration and system administration via RJ45
- VGA-output for display on a secondary monitor
- Powerful 20W audio speaker
- Top-loading, cover for quick and easy lamp replacement
- Sealed optical engine, minimizing the impact of dust and smoke
- Keypad lock prevents accidental system adjustments

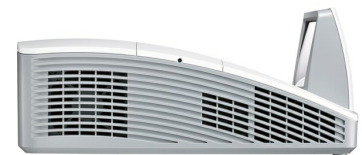

Peace of mind and lower total cost of ownership

With a high brightness of 3,300 ANSI Lumens and a 10,000:1 contrast ratio the D755WT is able to deliver sharp, vibrant pictures. The projector features direct 3D, ensuring that the D557WT is more than capable of handling media applications available now and in the future. The new Dynamic Eco lamp management system, increases the lamp life up to 10,000 hours, which makes the D755WT an economic projector to run.



D755WT SPECIFICATIONS

Image	Display Type	Single chip DLP® Technology by Texas Instruments
	Brightness	3300
	Native Resolution	WXGA (1280 x 800)
	Max. Supported Resolution	WUXGA (1920x1200) @60Hz
	Native Aspect Ratio	16:10
	Contrast Ratio	10,000:1
	Keystone Correction	Vertical: +/- 40°
	Optical	Throw Ratio
Zoom Ratio		Fixed 1x
Lens Shift (Based on Full Image Height)		Limited Lens Shift Vertical ±1.7%
Image Size (Diagonal)		80"- 100"
Projection Distance		283 - 446 mm
Projection Lens		F = 2.5, f = 5.1 mm
Offset (Based on Full Image Height)		120%
Features		Features
Compatibility	Video	SDTV (480i, 576i) / EDTV (480p, 576p) / HDTV (720p, 1080i, 1080p), NTSC (M, 3.58/4.43 MHz), PAL (B,D,G,H,I,M,N) SECAM (B,D,G,K,K1,L)
Connectivity	I/O Connection Ports	VGA-In (15pin D-Sub) (x2), HDMI v 1.4 , Display Port, S-Video, Composite Video, Audio-In (RCA) , Audio-In (Mini-Jack), VGA-Out (15pin D-Sub), Audio-Out (Mini-Jack), RJ45, RS-232, 3D-Sync, USB A (Power Only), USB B (Service), Microphone (Mini-Jack)
General	Dimensions (W x D x H)	287.7 x 374.5 x 122.6 mm (not including height of mirror)
	Weight	5
	Power	Supply: AC 100-240V, 50/60Hz Consumption: 250W (Eco. Mode), 290W (Normal Mode), <0.5W (Standby)
	Lamp Life and Type	5,000 / 10,000 Hours (Normal / Eco. Mode), 230W/200W
	Speakers	10W x 2
	Noise Level	33dB / 29dB (Normal / Eco. Mode)
	Standard Accessories	VGA Cable, User Manual (CD), Quick Start Guide, Warranty Card (by region), Remote Controller (with battery), IR interactive Pen / nbr, AC Power Cord
	Optional Accessories	Spare Lamp P/N (5811118004-SVV), 3D Glasses P/N (3534257700), Universal Wall Mount (T/R 0.35) (3900228200), Remote Control P/N (5041827500), Interactive Pen P/N (5811118885-SVV)
	Warranty	Standard Warranty: 3 years projector / 1 year on lamp or 1000 hours whichever comes first, Education Warranty: 5 years projector / 3 years on lamp or 2000 hours whichever comes first
	UPC Code	814964 338631